

STATE OF OREGON
DEPARTMENT OF GEOLOGY AND MINERAL INDUSTRIES
1069 State Office Building Portland 1, Oregon

HISTORY OF OIL OR GAS WELL


(Submit in duplicate)

In compliance with rules and regulations adopted pursuant to ORS 520.095 (Chapter 667 OL 1953)

Operator **Standard Oil Company of California** Field **Wildcat**

Well No. **Hoagland Unit #1** , Sec. **11** , T. **7 N** R. **10 W** **W. B. & M.**

Signed

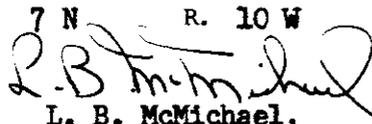

L. B. McMichael,

Date **6-5-55**

Title

Area Exploration Supervisor
(President, Secretary or Agent)

It is of the greatest importance to have a complete history of the well. Use this form in reporting the history of all important operations at the well, together with the dates thereof, prior to the first production. Include in your report such information as size of hole drilled to cementing or landing depth of casings, number of sacks of cement used in the plugging, number of sacks or number of feet of cement drilled out of casing, depth at which cement plugs started, and depth at which hard cement encountered. If the well was dynamited, give date, size, position and number of shots.

Date If plugs or bridges were put in to test for water, state kind of material used, position and results of pumping or bailing.

Spudded inside 18½" conductor pipe on 4-27-55.

Drilled 17½" hole to 618'.

Cemented 13 3/8" casing at 618' with 450 sacks of cement.

Drilled 10 5/8" hole to 3260') See Form 3 - 1/54 for 8½" cored intervals.

Drilled 9 7/8" hole to 7101')

No water zones or hydrocarbon shows of interest were encountered. Partial losses of circulation were encountered at 3400' and below 6200'.

While drilling at 7101' a twist off occurred leaving 172' of fish in the hole.

All attempts to recover the fish failed.

A cement plug, of 125 sacks construction cement, was pumped in place through 4½" open end drill pipe hung at 630'. Approximately 9 hours later the top of solid cement was found at 537'.

A final lineal 15' plug of cement was poured in the top of the casing. A steel plate was welded over the casing and a 2" pipe left sticking up to mark the exact location. Well abandoned 6-17-55.

END OF LOG